



LANDING DOORS

Q75 SERIES

FIRE RATED TYPE

PRISMA S.P.A

Strada Della Pace 23 ter
I 43055 Mezzani Località Casale
(Pr) Italy
Tel. +39 0521 3164.11
Fax +39 0521 3164.333
e-mail sales@prismaitaly.it
www.prismaitaly.it

INDIA - PRISMA DSA INDUSTRIES PVT. LTD.
sales@prismadsa.com - www.prismadsa.com

IRAN - PRISMA LIFT COMPONENTS LTD.
sales@prismalc.com - www.prismalc.com

SPAIN - PUERTAS PRISMA SL
sales@puertasprisma.es - www.puertasprisma.es

INSTALLATION LAYOUT




INDEX**FRAME PLACE REQUIREMENT**☐☐ **03** ☐☐**L2S/R-L**☐☐ **05** ☐☐**L4C**☐☐ **06** ☐☐

FRAME PLACE REQUIREMENT

FRAME PLACE REQUIREMENT


WITHOUT COATING

DOOR HEADER

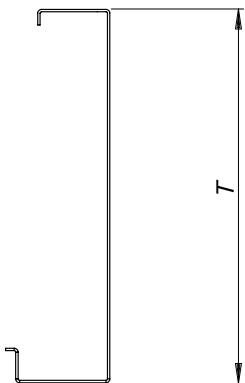


WITH COATING


DOOR HEADER

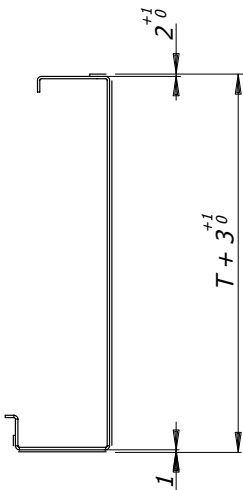


SIDE POSTS

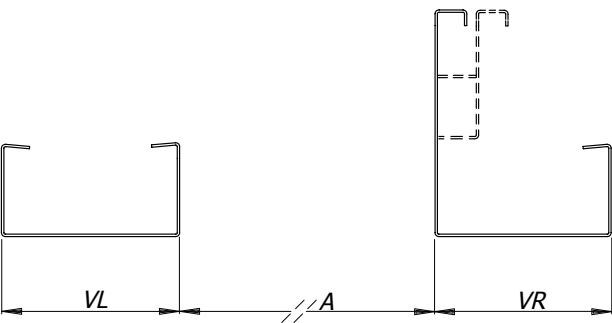

SIDE POSTS

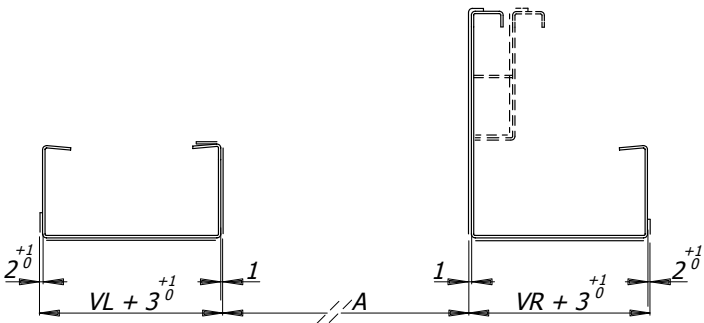




L2S



L2S/R-L


A 600 - 1150

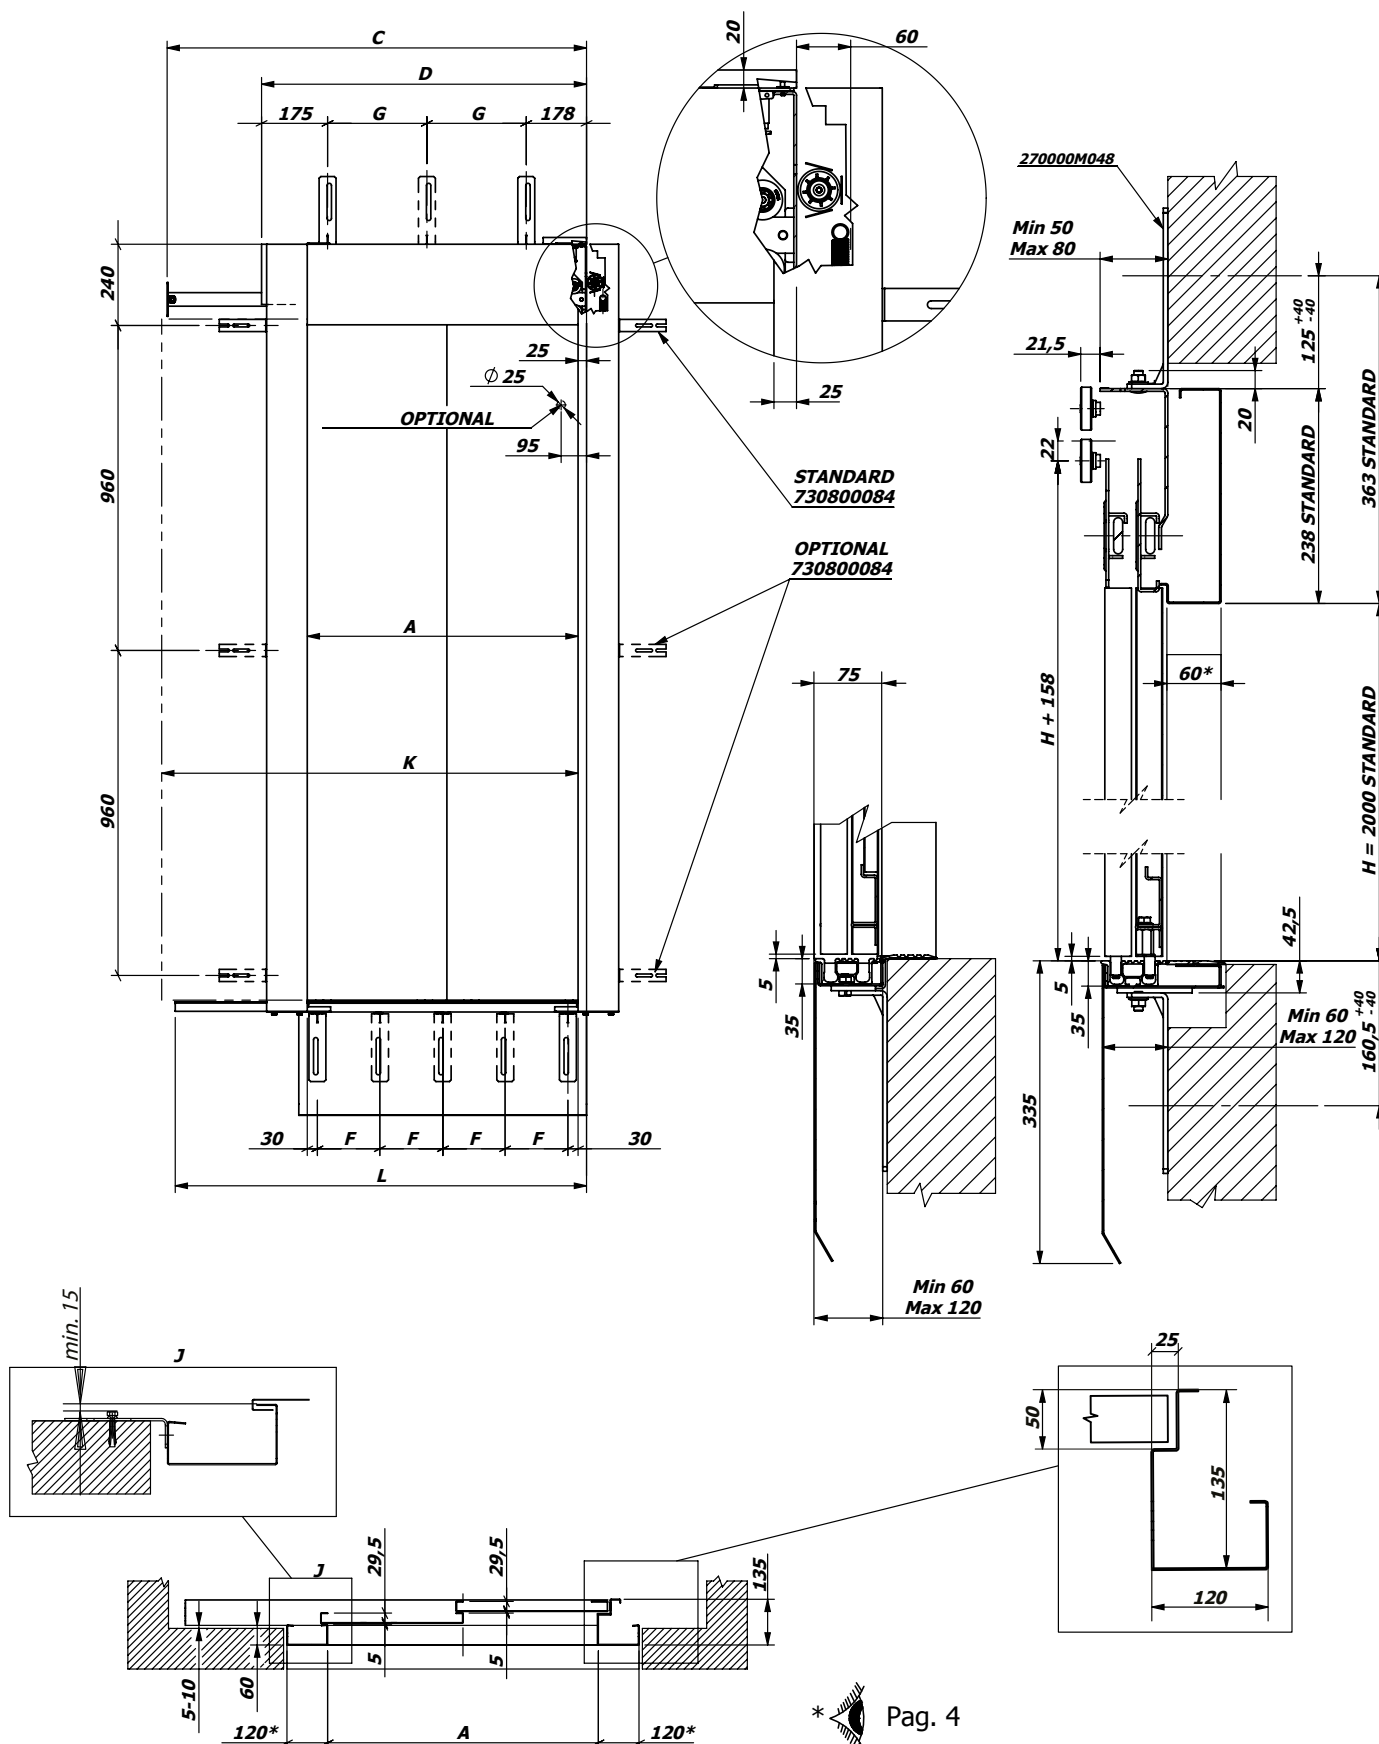

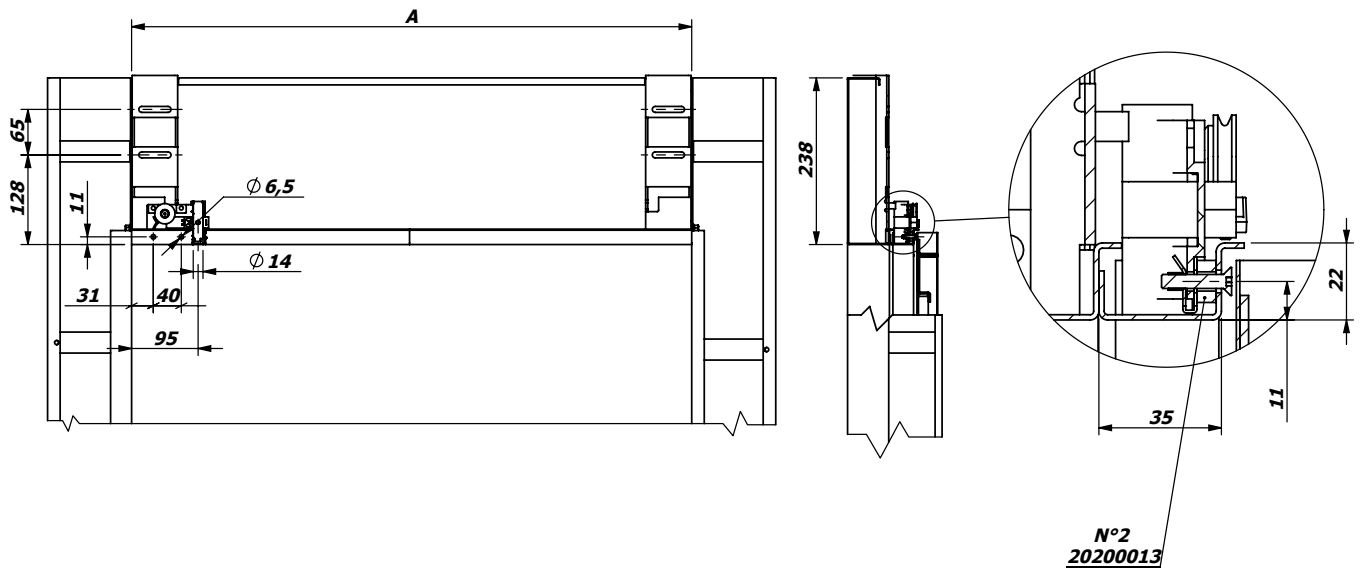FIXING / OVERALL DIMENSIONS**A 600 - 1150**


H	A	C	D	F	NR.	G	NR.	K	L
≤ 2100	600	986	748	270 ± 5	3	395 ± 5	2	950	920
	650	1036	940	295 ± 5		395 ± 5		1025	995
	700	1086	940	320 ± 5		395 ± 5		1100	1070
	750	1136	940	345 ± 5		395 ± 5		1175	1145
	800	1239	940	370 ± 5		395 ± 5		1250	1220
	850	1289	1235	395 ± 5		395 ± 5		1325	1295
	900	1389	1235	420 ± 5	4	441 ± 5	3	1400	1370
	950	1439	1235	445 ± 5		441 ± 5		1475	1445
	1000	1539	1235	313,5 ± 5		441 ± 5		1550	1520
	1050	1589	1535	330 ± 5		591 ± 5		1625	1595
	1100	1689	1535	346,5 ± 5		591 ± 5		1700	1670
	1150	1739	1535	363,5 ± 5		591 ± 5		1775	1745

[illegible]



L4C

L4C







L4C


Technical drawing of a rectangular frame structure, showing dimensions and labels:

- Overall Dimensions:**
 - Width: C (top) and D (top).
 - Height: 240 (top), 960 (middle), and 960 (bottom).
 - Bottom Width: L (bottom).
- Internal Dimensions and Spacing:**
 - Top internal spacing: G (left), 400 (center), and G (right).
 - Bottom internal spacing: 30 (left), F (four times), and 30 (right).
- Structural Details:**
 - A central vertical rod with diameter $\phi 25$ and a horizontal offset of 95 .
 - A horizontal rod labeled A intersecting the central rod.
 - A vertical rod labeled K intersecting the horizontal rod A .
 - Four vertical rods at the bottom, each with a dashed outline.
 - Four vertical rods at the top, each with a dashed outline.
 - Four horizontal rods at the top, each with a dashed outline.
 - Four horizontal rods at the bottom, each with a dashed outline.


STANDARD
730800084
OPTIONAL
730800084

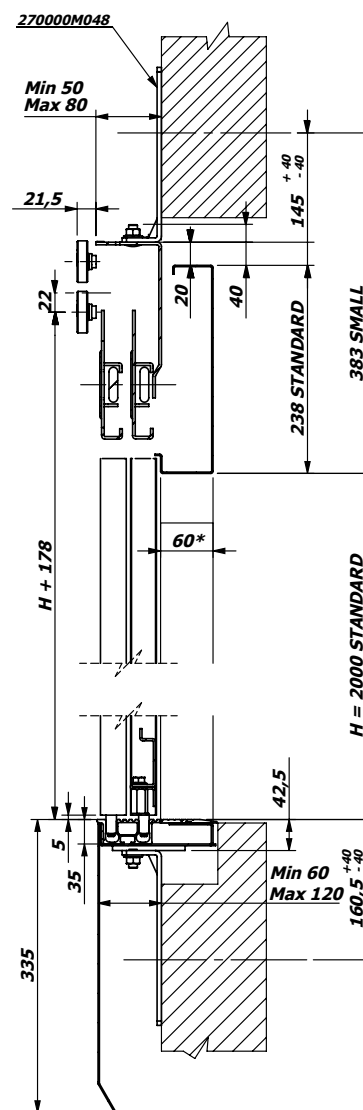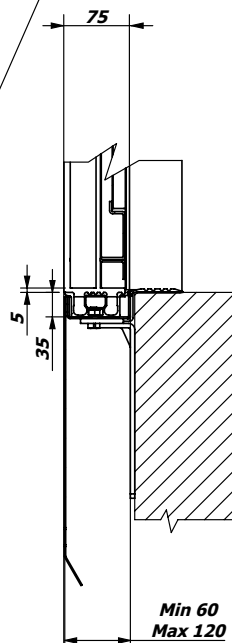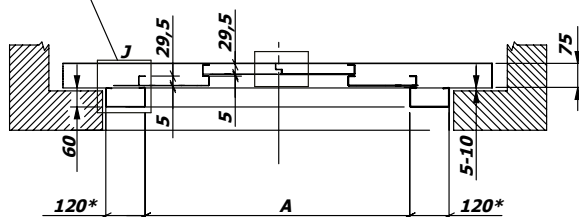

Pag. 4

FIXING / OVERALL DIMENSIONS

L4C

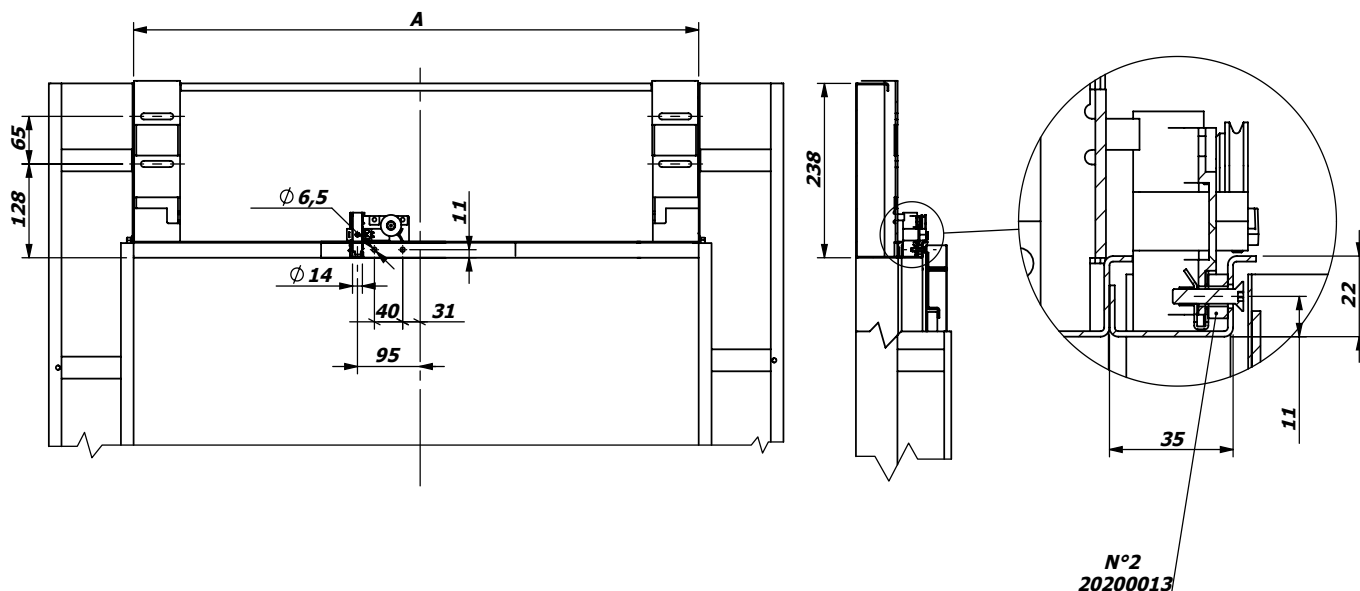**A 650 - 1150
SMALL**

H	A	C	D	F	NR.	G	NR.	K	L
≤ 2100	650	1163	1138	295 ± 5	4	269	2	1059	1015
	700	1213	1138	320 ± 5		269		1134	1090
	750	1263	1138	345 ± 5		344		1209	1165
	800	1313	1288	370 ± 5		344		1284	1240
	850	1363	1288	395 ± 5		344		1359	1315
	900	1463	1438	420 ± 5		419	3	1434	1390
	950	1463	1438	445 ± 5		419		1509	1465
	1000	1613	1588	313,5 ± 5		419		1584	1540
	1050	1663	1588	330 ± 5		494		1659	1615
	1100	1713	1688	346,5 ± 5		544		1734	1690
	1150	1763	1688	363,5 ± 5		544		1809	1765



PRISMA IN THE WORLD



ITALY - PRISMA S.p.A.
sales@prismaitaly.it - www.prismaitaly.it



IRAN - PRISMA LIFT COMPONENTS LTD.
sales@prismalc.com - www.prismalc.com



INDIA - PRISMA DSA INDUSTRIES PVT. LTD.
sales@prismadsa.com - www.prismadsa.com



SPAIN - PUERTAS PRISMA SL
sales@puertasprisma.es - www.puertasprisma.es